




VECTIS LUBE

Gear lubricant

FEATURES

VECTIS LUBE is a mineral lubricating oil with **EXTREME PRESSURE** additive, specific for the lubrication of linear and helical type cylindrical gears subjected to high contact pressures. This is the most suitable product for the lubrication of gear reducers, worm gear, spherical plain bearings, translation screws, hydrokinetic joints, etc. The product has the following characteristics:

- ✓ Can be used at operating temperatures up to a maximum of 110 ° C.
- ✓ Contains anti-wear additives, extreme pressures and demulsifiers.
- ✓ High viscosity index, for use at extreme temperatures..
- ✓ It has no corrosive action against any type of metal.

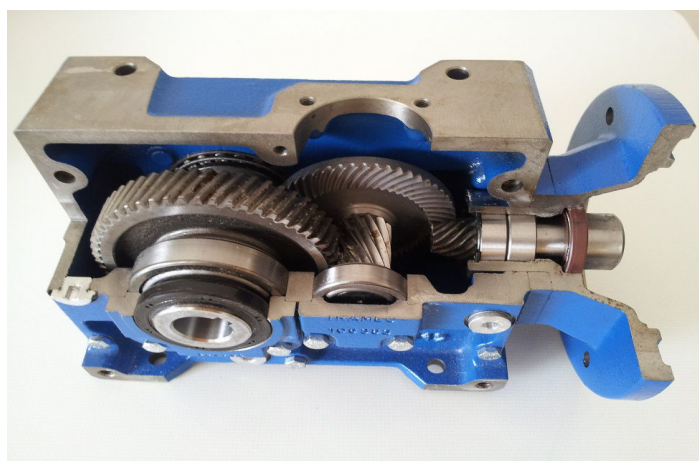

VECTIS LUBE ISO law 3448	150	220	320	460
Viscosity E 50°C	11,5	16,5	23	33
Viscosity cSt 100°C	14,8	19,2	24	31
Viscosity cSt 40°C	145	215	308	460
Flash point VA	240	250	255	260
Sliding point	-22	-20	-15	-12
Density 15°C Kg/m³	892	895	900	902
I.V.	101	100	98	97